




CN06-SW01/02-T5产品规格书

6mm储能连接器系列→通孔式T5

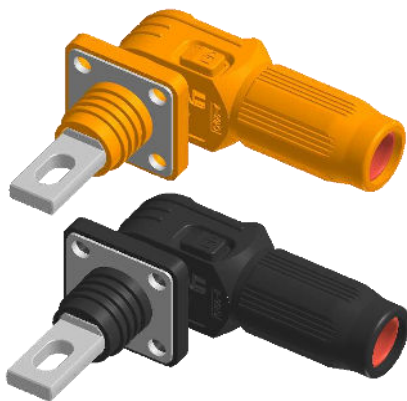

产品特点Characteristic


插头Plug	直头结构, 360°自由旋转, 便于多方位出线 Rectangular structure, 360° free rotation, easy to multi-directional line
插座Receptacle	抗电弧和防水设计 Arc resistant and waterproof design
连接Connection	采用扭簧冠体连接技术 Crown spring connection technique
松脱Loose	侧压式一键松脱 Side press one key release
保护Protection	防触指防误插, 功能保护 Anti-contact finger protection against misinsertion
颜色Color	具有正负极橙、红、黑颜色防误识别 With polarity color error - proof recognition

技术参数Parameter

材 质 Material	PA66/T2Y纯铜	额定电压 Rated Voltage	1000V DC
接触电阻 Resistance	$\leq 0.5m\Omega$ (100mA)	额定电流 Rated Current	70A/100A/120A
绝缘电阻 Insulation Resistance	$>5000M\Omega$ (常温常湿)	适配线缆 Cable	10/16/25mm ²
介电强度 Dielectric Strength	4200V AC/min	芯 数 Number of cores	单芯
插拔次数 Frequency	500次	防护等级 IP Rating	IP67
插 拔 力 Insertion force	$\leq 75N$	阻燃等级 Flame Retardant Rating	UL94 V-0
盐雾等级 Salt Spray	NSS 96h	工作温度 Working Temperature	- 40°C ~ 125°C
安装螺丝 Mounting screw	M4×8/2N.m	接线螺丝 Terminal screw	M5×14/3.5N.m

产品尺寸Dimension (未注尺寸公差按±0.1mm)

插头

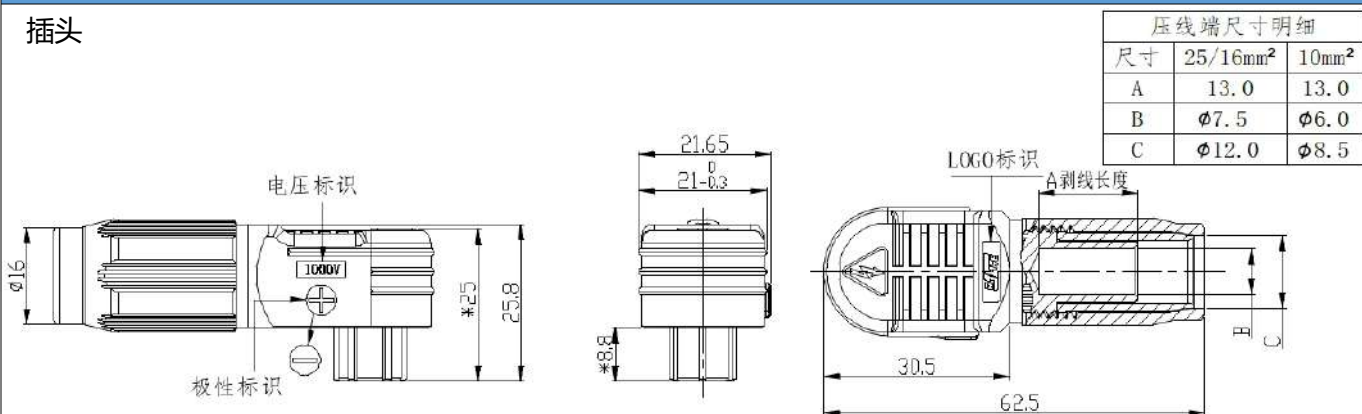

插座

