



Tel:+86 13288956228
Email:Ryan@pvlinktech.com

IP68 防水接线盒/ waterproof junction box **M686-3(B)**



可选择端子/Optional Terminal

PA10-3



863-3









产品参数/Technical data

型号 Model	M686-3(C)		
材料 Material	UL94V-2 Fire and flame retardant		
额定输出 Rated power	IEC/NSW:24A 450VAC ETL:10-15A 300VAC		
防护等级 IP code	IP68		
接线端子 Terminal	PA10 terminal or other terminals available		
工作温度 Working	T105		
接线范围 Rated connecting capacity	欧规 European:0.5 ~ 2.5mm² 澳规 Australia:0.5 ~ 2.5mm² 美规 American:SJOW 14-18AWG		
密封胶塞/seal plug			
胶塞孔径/plug aperturer	8mm	11mm	11mm
适用线径/Available cable diameter (橡胶圆线/Round rubber cable)	1*M16(4-8mm)	2*M20(6-11mm)	2*M20(6-11mm)
防水测试 Testing	10M 150hours		
产品尺寸 Product Size(参考实际尺寸图)	外尺寸/External dimensions: 131.62*56.67*31.2mm 内尺寸/Internal dimensions: 72.4*45.27mm (Refer to actual drawing)		
认证 Certification	ENEC,CE,UKCA,ETL,NSW,CB,ROHS		
产品质保/Quality Assurance	1 年/ one year		
产品应用/Application	水底/Underwater(淡水 fresh water) 地埋/Underground		
注/Mark:			
1.不能使用在盐碱土壤/Do not use in saline soil			
2.不能长期接触油性物质或浸泡在油污中/Do not contact oily substances or soak in oil for a long time			
3.不建议长期在日照暴晒下使用/Long time exposed under sunshine is not recommended			



产品图纸/Product drawings

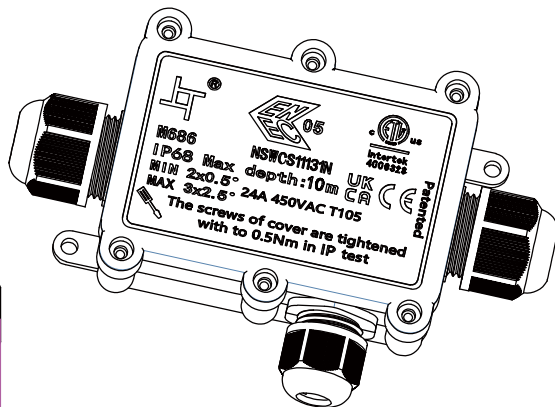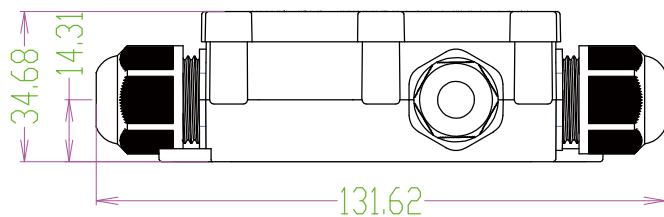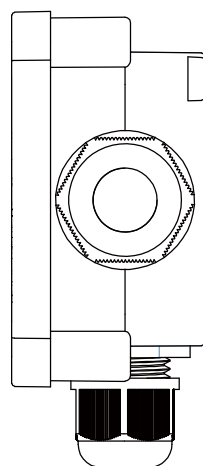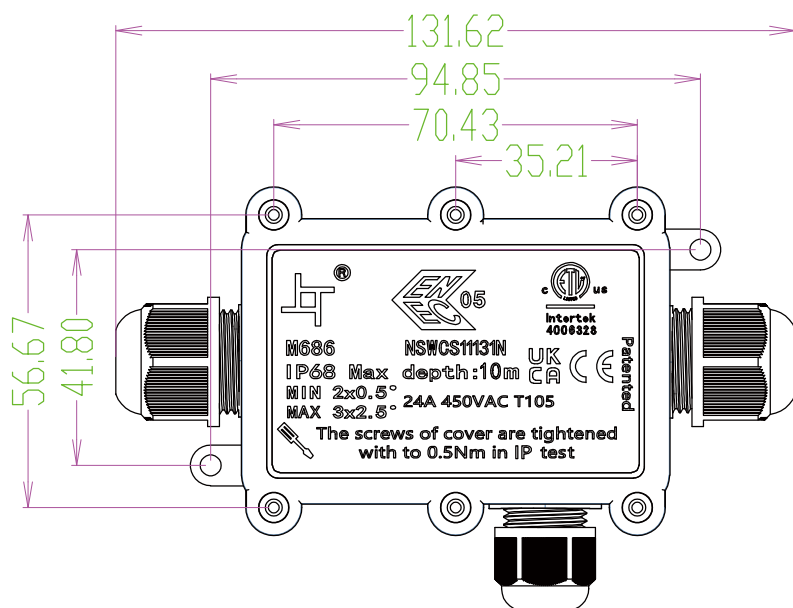

工程部 (签名)	模具部 (签名)	审核 (签名)	年、月、日 (年月日)	料号		产品图
Xinyi Suofanta Technology Co., Ltd.	谢东					M686-3(C)